




•2D Twin Wire Fence  
with PP Privacy Strips

## TECHNICAL SPECIFICATIONS

- It is strengthened with supports added between two parallel panels
- It is monolithic, all systems are produced and assembled at the same time.
- It does not require maintenance thanks to the galvanized coating.
- When fitted with PP privacy strips, it ensures both security and privacy for private residences, offering a modern and elegant alternative to concrete walls, composite panels and wooden fences.



Nano Coating



Installation on concrete



Above ground installation

HQ : Eyüp Sultan Mh.Osmangazi Cd. No:146 Sancaktepe / İstanbul  
Fabric : Makine ihtisas Org. San. Böl. 112 ada 3 parsel 5 Cd. No:8 Dilovası /Kocaeli

Tel: +90 (216) 561 00 34 Fax: +90 (216) 311 20 29  
Tel: +90 (262) 502 08 04/05 Fax: +90 (262) 502 08 09







[www.usakligilfence.com](http://www.usakligilfence.com)



[info@usakligilfence.com](mailto:info@usakligilfence.com)



usakligilfence

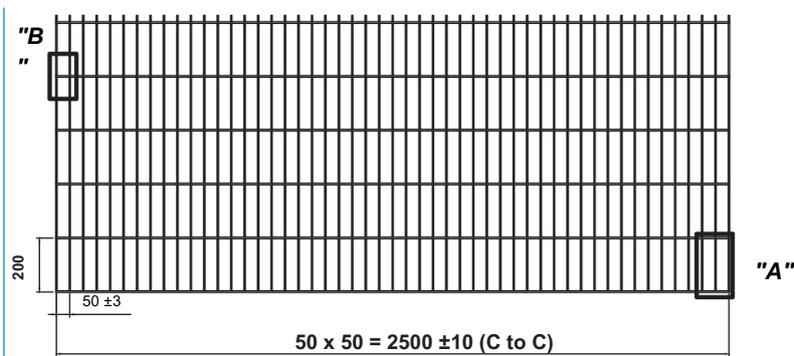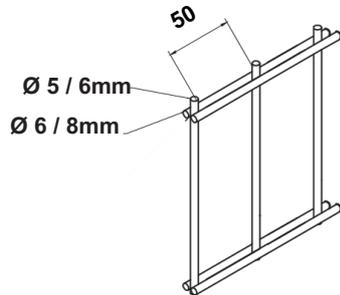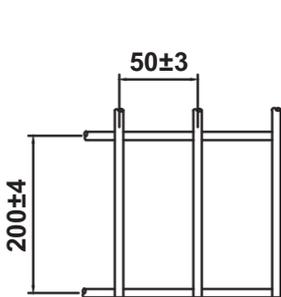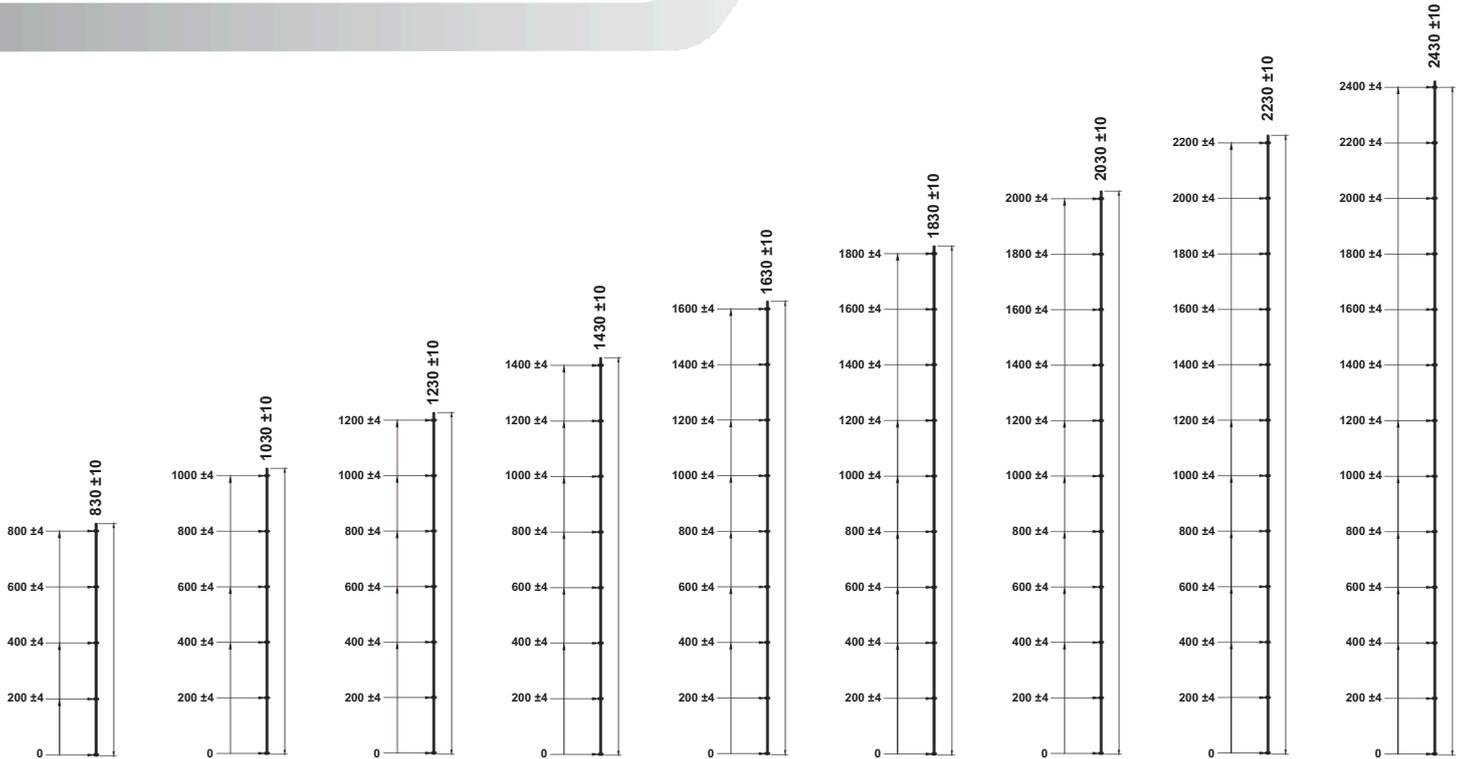

### WELDING POINTS

TS EN 10223-7

DOUBLE PANEL FENCE				PROFILE POST				
Height (mm)	Width (mm)	Mesh (mm)	Wire Diameter (mm)	Post Size (mm)	Base Plate (mm)	Embedded (mm)	Coating	
830	2500	50x200	5,00	60x60	800	1300	Pre- Galvanized & Hot Dip galvanized TS 914 - EN ISO 1461	
1030					1000	1500		
1230					1200	1700		
1430					1400	1900		
1630					1600	2100		
1830					1800	2300		PPS and / or TPC Coating over Galvanized Surface
2030					2000	2500		
2230					2200	2700		
2430					2400	2900		