

TECHNICAL SPECIFICATIONS

- It has a solid structure with the harmony of horizontal and vertical bars.
- Thanks to the twisted bars, it does not sag and has an upright stance.
- It is monolithic, all systems are produced and assembled at the same time.
- It does not require maintenance thanks to its galvanized coating.



Nano Coating



Installation on concrete



Above ground installation



HQ : Eyüp Sultan Mh.Osmangazi Cd. No:146 Sancaktepe / İstanbul /

Fabric : Makine ihtisas Org. San. Böl. 112 ada 3 parsel 5 Cd. No:8 Dilovası /Kocaeli

Tel: +90 (216) 561 00 34 Fax: +90 (216) 311 20 29

Tel: +90 (262) 502 08 04/05 Fax: +90 (262) 502 08 09




www.usakligilfence.com




info@usakligilfence.com



[usakligilfence](https://www.facebook.com/usakligilfence)

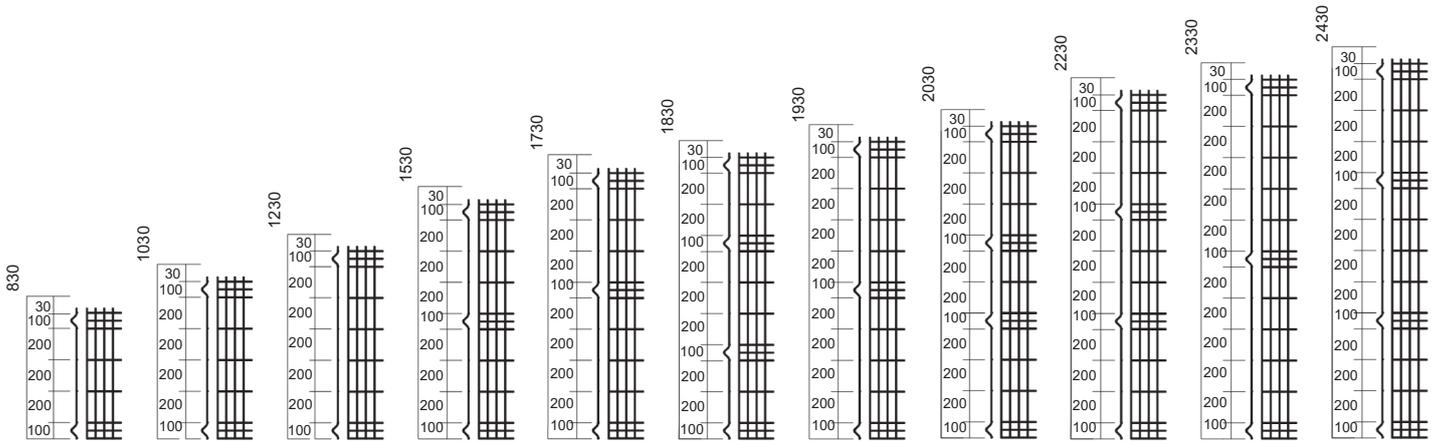

830	1030	1230	1530	1730	1830	1930	2030	2230	2330	2430
Vertical ; 46Pcs Horizon ; 8Pcs	Vertical ; 46Pcs Horizon ; 9Pcs	Vertical ; 46Pcs Horizon ; 10Pcs	Vertical ; 46Pcs Horizon ; 13Pcs	Vertical ; 46Pcs Horizon ; 14Pcs	Vertical ; 46Pcs Horizon ; 16Pcs	Vertical ; 46Pcs Horizon ; 15Pcs	Vertical ; 46Pcs Horizon ; 17Pcs	Vertical ; 46Pcs Horizon ; 18Pcs	Vertical ; 46Pcs Horizon ; 17Pcs	Vertical ; 46Pcs Horizon ; 19Pcs

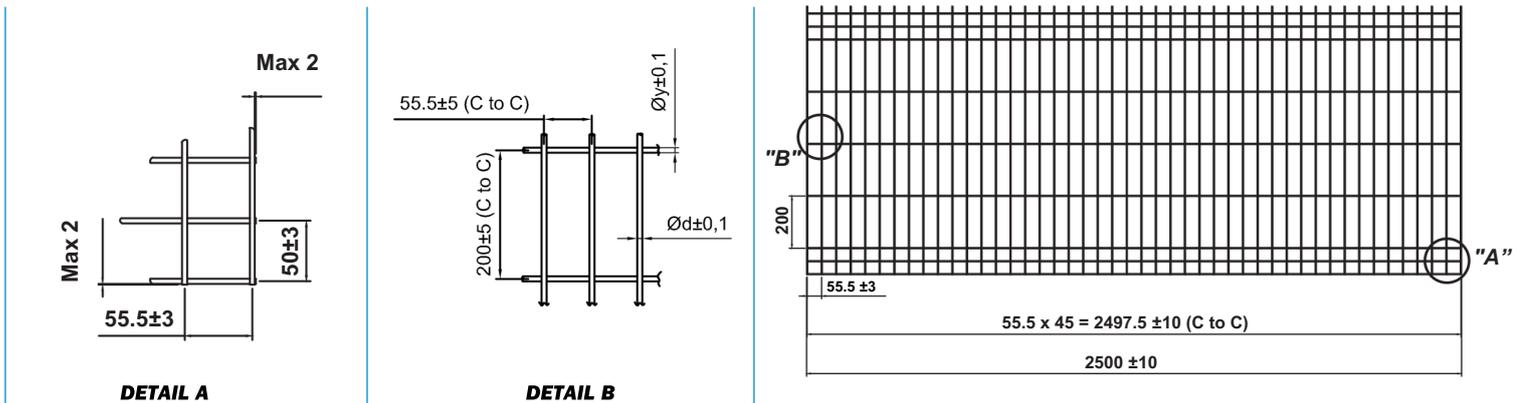

WELDING POINTS
TS EN 10223-7

SINGLE PANEL FENCE

PROFILE POST

Height (mm)	Width (mm)	Wire Spacing (mm)	Wire Diameter (mm)	Bendings (Ad./Pcs)	Post Size (mm)	Post Dimensions (mm)		Coating
						Base Plate	Embedded	
830	2500	55,5 x 200	4,00	2	50x50 60x60	800	1300	Pre- Galvanized & Hot dip galvanized TS 914 - EN ISO 1461
1030				1000		1500		
1230				1200		1700		
1530				1500		2000	PPS and/or TPC Coating over Galvanized Surface	
1730				1700		2200		
1830				1800		2300		
1930				1900		2400		
2030				2000		2500		
2230				2200		2700		
2330				2300		2800		
2430	2400	2900						